


HIGH POWER BRAKE RESISTORS

IP20 and IP22

TYPE HPBR34-06, -08, -10, -12

POWER RANGE: 2.4kW–4.8kW @ 100% Duty. 28kW–56kW @ 6% Duty.

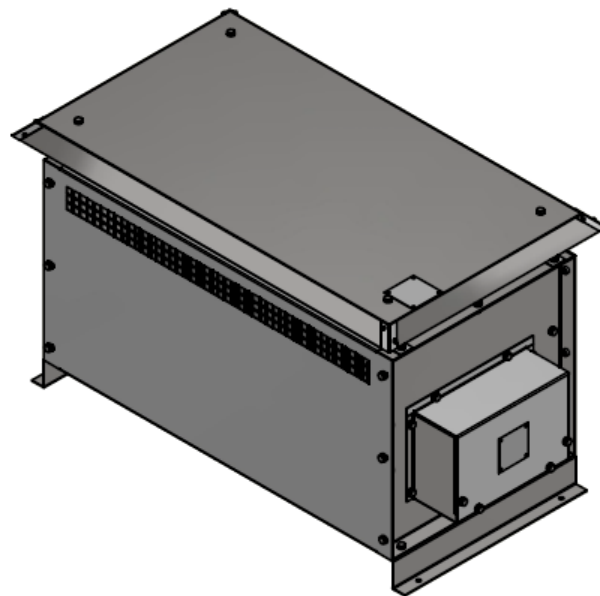

REV	DATE	CHANGE DESCRIPTION	CHANGED BY
3	2022-01-26	• Addition of HPBR34 range	W. M

HIGH POWER BRAKE RESISTOR TYPE HPBR34-06, -08, -10, -12
DESCRIPTION: Type HPBR34-XX.

The HPBR34-06 to HPBR34-12 range of enclosed brake resistors is a low cost solution for high power, short duty dynamic braking of electric motors driven by a variable speed/frequency drive (VSD, VFD).

The HPBR34-XX is the "little sister" version of the latter described HPBR50-XX range, allowing for a more compact solution where space is limited.

A more compact and non-enclosed option is also available which may be fitted to the internal chassis of an enclosure.

APPLICATIONS

- Short duty-cycle dynamic braking. Refer to the table of Electrical Specifications below
- Continuous operation.

ACTIVE MATERIAL

- High grade stainless steel resistive alloy.
- Resistor type: Grid/plate resistors.

MECHANICAL CHARACTERISTICS

- Enclosure material: Galvanized metal, standard. Grade 304 stainless steel is optional.
- Enclosure type HPBR34-06: 9522-031
- Enclosure type HPBR50-08:
- Enclosure type HPBR50-10:
- Enclosure type HPBR50-12:
- Rigid construction.
- Ingress Protection: IP20 standard, IP22 optional (IP20 enclosure with raised roof).
- Removable terminal cover.

TERMINAL CONNECTIONS

- M8 stud.
- Cable entry: Gland-plate.

OPTIONAL EXTRAS

- An adjustable thermostat may be fitted to monitor the air temperature above the resistors.
- Thermostat connections: NO, COM, NC. Potential free contacts.

2022/01/24	3	HPBR34-XX and HPBR50-XX		1 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE

ELECTRICAL SPECIFICATIONS: Type HPBR34-06, -08, -10, -12

Duty %	100% (Continuous)	50%	40%	25%	15%	10%	6%
T _{on} seconds (s)	120s	60s	48s	30s	18s	12s	7s
T _{off} seconds (s)	0s	60s	72s	90s	102s	108s	113s
Power HPBR34-06	2.4kW	6.4kW	7.7kW	10.2kW	16.8kW	23.0kW	28.1kW
Power HPBR34-08	3.2kW	8.5kW	10.2kW	13.6kW	22.4kW	30.6kW	37.4kW
Power HPBR34-10	4.0kW	10.6kW	12.8kW	17.0kW	28.0kW	38.3kW	46.8kW
Power HPBR34-12	4.8kW	12.8kW	15.3kW	20.4kW	33.6kW	46.0kW	56.1kW


- Period **P** (cycle time) = 120 seconds. **P = T_{on} + T_{off}** (Refer to Duty Cycle diagram below).
- Power values @ 20°C ambient.
- Resistance tolerance: +/- 5%
- Voltage: 1.25kV
- >1.25kV upon request.

REQUIRED INFORMATION:

Upon your enquiry, refer to the diagram of the **Duty Cycle** below. The following is required for us to offer the most economical solution:

- Power of the resistor.
- Minimum resistance value.
- **T_{on}** = time in seconds that the resistor is powered. (Braking time).
- **T_{off}** = time in seconds that the resistor is not powered.
- Number of repetitive cycles (period).
- Location of the installation for the resistor.

NOTE: The above ELECTRICAL SPECIFICATIONS TABLE is a guide only. The required resistance value may require the use of a higher power rating to obtain the desired resistance value.

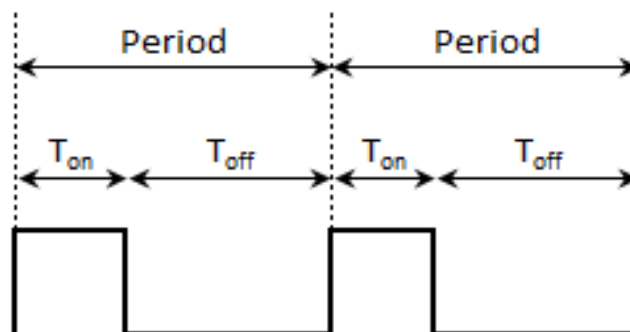
Duty Cycle


$$\text{Period} = T_{\text{on}} + T_{\text{off}}$$

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) * 100$$

(On Percentage)

2022/01/24	3	HPBR34-XX and HPBR50-XX		2 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE

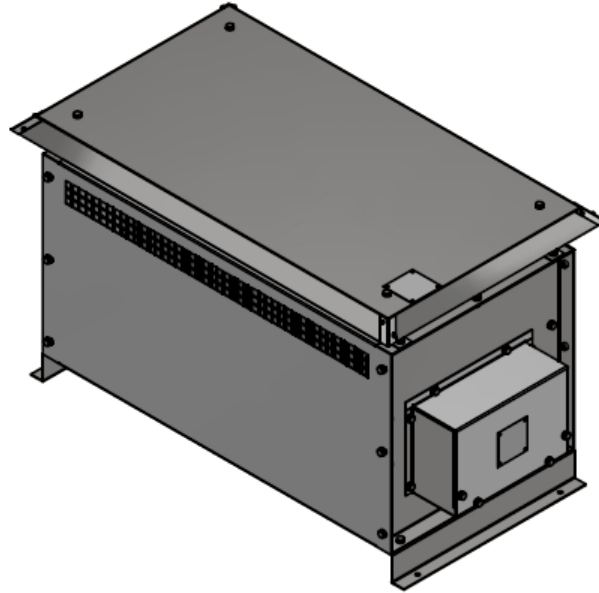HIGH POWER BRAKE RESISTOR TYPE HPBR50-08, -10, -12, -16, -20, -26, -32
POWER RANGE: 7kW–30kW @ 100% Duty. 58kW-232kW @ 6% Duty


2022/01/24	3	HPBR34-XX and HPBR50-XX		3 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE

DESCRIPTION: Type HPBR50-XX.

The HPBR50-08 to HPBR50-32 range of enclosed brake resistors are a low cost solution for high power, short duty dynamic braking of electric motors driven by a variable speed/frequency drive (VSD, VFD).

A more compact and non-enclosed option is also available for the HPBR-08 version which may be fitted to the internal chassis of an enclosure.

APPLICATIONS

- Short duty cycle dynamic braking. Refer to the table of Electrical Specifications.
- Continuous operation.

INDUSTRY

- Automation, Manufacturing, Mining.

ACTIVE MATERIAL

- High grade stainless steel resistive alloy.
- Resistor type: Grid/plate resistors.

MECHANICAL CHARACTERISTICS

- Enclosure material: Galvanized metal, standard. Grade 304 stainless steel is optional.
- Enclosure type HPBR50-08: 9522-023
- Enclosure type HPBR50-12: 9522-022
- Enclosure type HPBR50-16: 9522-024
- Enclosure type HPBR50-20: 9522-025
- Enclosure type HPBR50-26: 9522-026
- Enclosure type HPBR50-32: 9522-028
- Rigid construction.
- Ingress Protection: IP20 standard, IP22 optional (IP20 enclosure with raised roof).
- Removable terminal cover.

TERMINAL CONNECTIONS

- M8 stud.
- Cable entry: Gland-plate.

OPTIONAL EXTRAS

- An adjustable thermostat may be fitted to monitor the air temperature above the resistors.
- Thermostat connections: NO, COM, NC. Potential free contacts.

2022/01/24	3	HPBR34-XX and HPBR50-XX		4 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE

ELECTRICAL SPECIFICATIONS: Type HPBR50-08, 10, 12, 16, 20, 26, 32

Duty %	100% (Continuous)	50%	40%	25%	15%	10%	6%
T _{on} seconds (s)	120s	60s	48s	30s	18s	12s	7s
T _{off} seconds (s)	0s	60s	72s	90s	102s	108s	113s
Power HPBR50-08	7kW	12kW	16kW	22kW	32kW	51kW	58kW
Power HPBR50-10	9kW	16kW	20kW	28kW	40kW	64kW	72kW
Power HPBR50-12	11kW	19kW	24kW	33kW	48kW	77kW	87kW
Power HPBR50-16	14kW	25kW	32kW	45kW	64kW	103kW	116kW
Power HPBR50-20	18kW	32kW	40kW	56kW	80kW	129kW	145kW
Power HPBR50-26	24kW	41kW	52kW	73kW	104kW	167kW	188kW
Power HPBR50-32	29kW	51kW	64kW	90kW	129kW	206kW	232kW


- Period **P** (cycle time) = 120 seconds. **P = T_{on} + T_{off}** (Refer to Duty Cycle diagram below).
- Power values @ 20°C ambient.
- Resistance tolerance: +/- 5%
- Voltage: 1.25kV
- >1.25kV upon request.

REQUIRED INFORMATION:

Upon your enquiry, refer to the diagram of the **Duty Cycle** below. The following is required for us to offer the most economical solution:

- Power of the resistor.
- Minimum resistance value.
- **T_{on}** = time in seconds that the resistor is powered. (Braking time).
- **T_{off}** = time in seconds that the resistor is not powered.
- Number of repetitive cycles (period).
- Location of the installation for the resistor.

NOTE: The above ELECTRICAL SPECIFICATIONS TABLE is a guide only. The required resistance value may require the use of a higher power rating to obtain the desired resistance value.

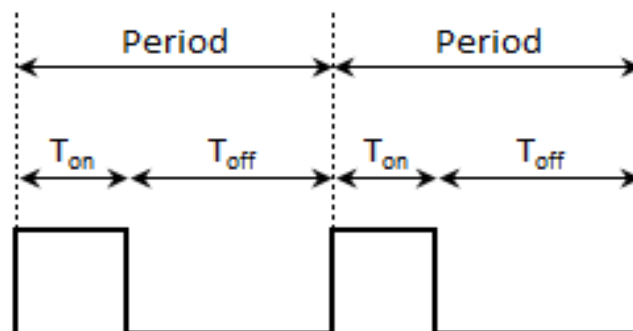Duty Cycle


$$\text{Period} = T_{\text{on}} + T_{\text{off}}$$


$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) * 100$$

(On Percentage)

2022/01/24	3	HPBR34-XX and HPBR50-XX		5 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE

HIGH POWER BRAKE RESISTOR ENCLOSURE DIMENSIONS

Enclosure Dimensions: HPBR34-XX and HPBR50-XX. Refer to page 7
Ingress Protection: IP20

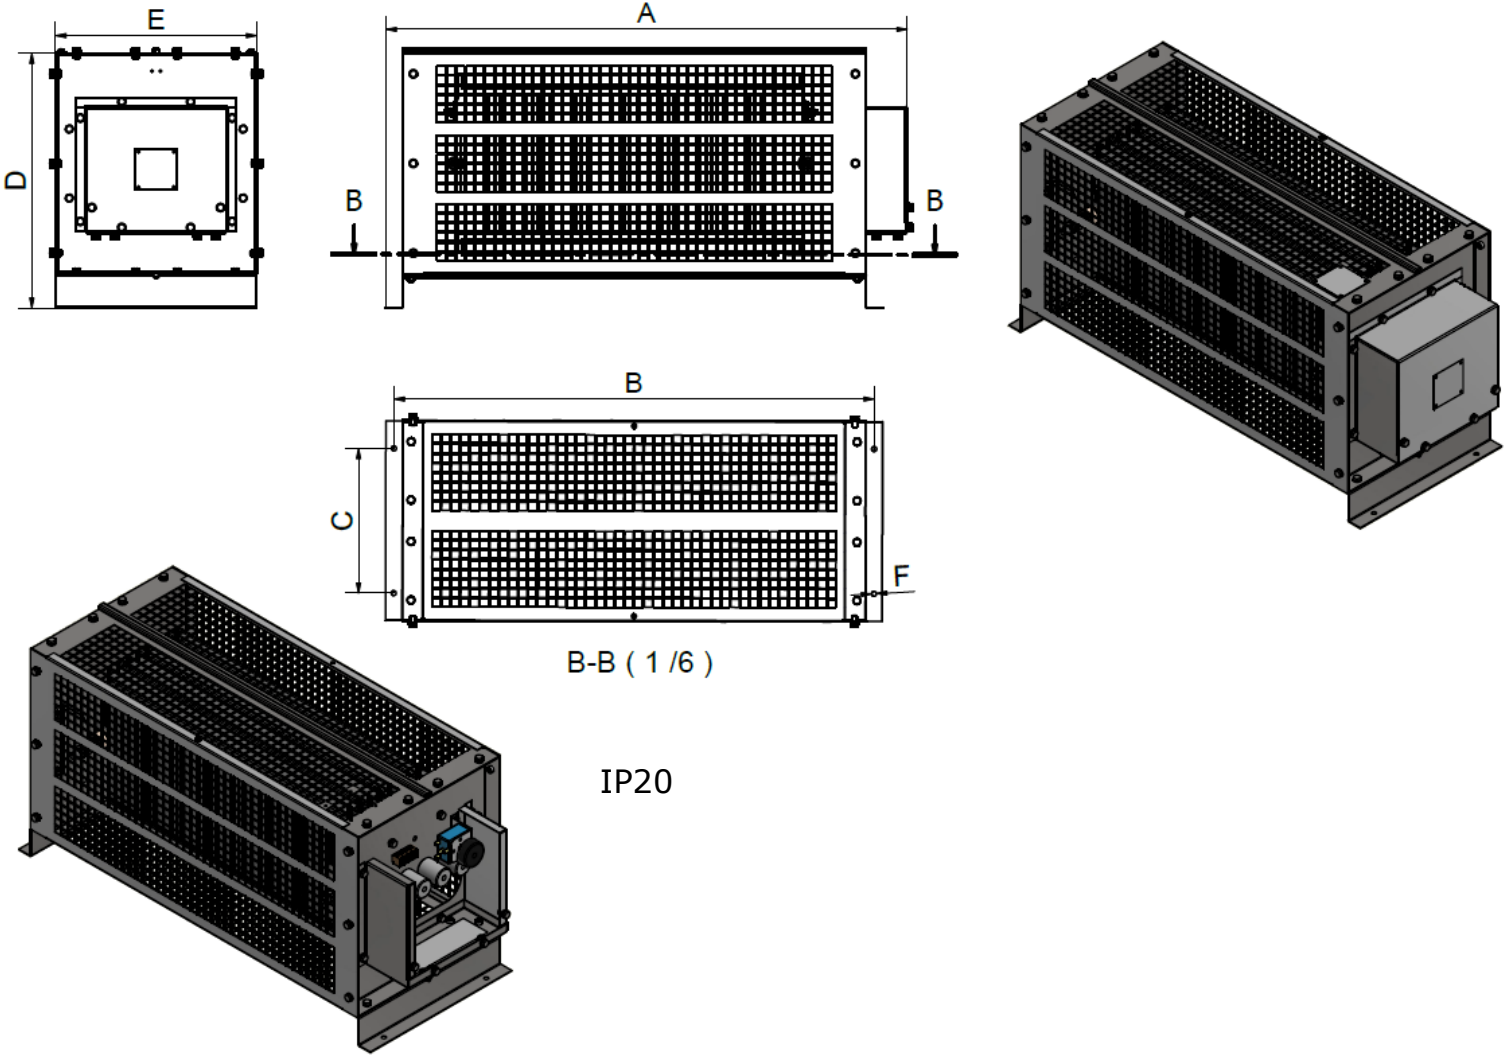


2022/01/24	3	HPBR34-XX and HPBR50-XX		6 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE



HIGH POWER BRAKE RESISTOR ENCLOSURE DIMENSIONS

Enclosure Dimensions: HPBR34-XX and HPBR50-XX
Ingress Protection: IP22

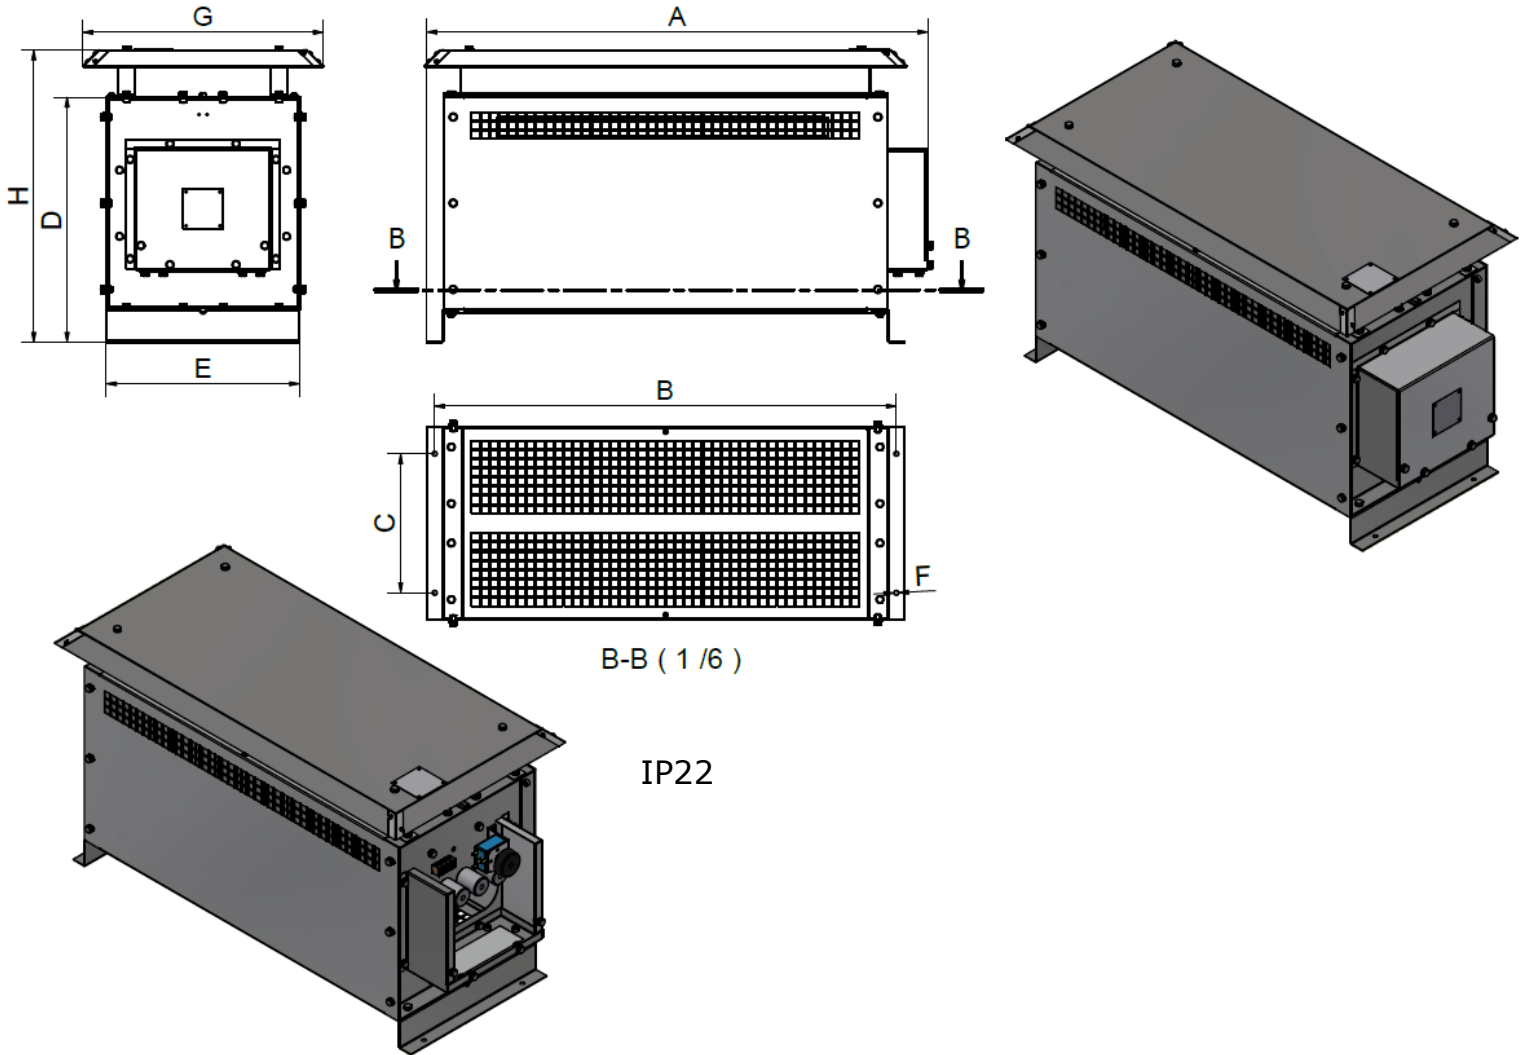

TYPE	DIMENSIONS IN mm							
HPBR34-06	A=577	B=510.6	C=150	D=300	E=230	F=Ø7	G=E+90	H=D+70
HPBR34-08								
HPBR34-10								
HPBR34-12								
HPBR50-08	A=756	B=696.6	C=210	D=370	E=292		G=E+90	H=D+70
HPBR50-12			C=290		E=372			
HPBR50-16			C=375		E=457			
HPBR50-20			C=475		E=557			
HPBR50-26			C=595		E=677			
HPBR50-32			B=705		C=710			

2022/01/24	3	HPBR34-XX and HPBR50-XX		7 of 7
PUBLISHED DATE	REVISION	CONTENTS	CREATED BY	PAGE